



Alfa Laval MultiMidget

Rotary spray head tank cleaning device for low-flow cleaning in hygienic applications

Introduction

The Alfa Laval MultiMidget is a rotary spray head tank cleaning machine for hygienic environments. Designed to clean tanks from 1-10 m³

The Alfa Laval MultiMidget minimizes the consumption of water and cleaning media. Easy to customize to meet customer requirements, the MultiMidget allows companies to spend less time cleaning and more time producing.

Application

The Alfa Laval MultiMidget is designed for the removal of residues from hygienic tanks across the dairy, brewery, distillery, beverage, food, IBC (intermediate bulk container), personal care and many other industries.

Benefits

- 40% faster cleaning = more time for production
- Saves up to 40% of your cleaning cost
- Dynamic cleaning performance and 360° full wetting
- Easy to retrofit traditional spray balls to a more economical solution
- Can be installed at any angle

Standard design


Different choice of spray pattern suitable for various applications and tank designs, ranging from simple tanks to more complex tanks with structure such as agitator and baffles. The MultiMidget is lubricated by the cleaning media.

Working principle


The flow of the cleaning media causes the head of the Alfa Laval MultiMidget to rotate, and the fan-shaped jets layout a swirling pattern throughout the tank or reactor. This generates the wetting/impact needed for the efficient removal of the residual product; the cascading flow covers all internal surfaces of the vessel.




Spray Pattern



360°



270° up



180° down

Certificates

2.1 material certificate.



TECHNICAL DATA


Lubricant:	Self-lubricating with the cleaning fluid
Wetting radius:	Max. 3 m
Impact cleaning radius:	Max. effective 1.4 m
Pressure	
Working pressure:	1-3 bar
Recommended pressure:	2 bar

PHYSICAL DATA

Materials	
Inlet connections/Balls:	316 (UNS S31600)
Bearing race parts:	Duplex steel (UNS S31803)
Head:	316 (UNS S31603)
Standard Surface finish:	Ra 0.8µm exterior/ Ra 0.8µm internal
Temperature	
Max. working temperature:	95°C
Max. ambient temperature:	140°C
Weight	
Thread:	0.50 kg
On pipe:	0.90 kg
Connections	
- Thread: 1/2" or 3/4" Rp (BSP) or NPT	
- Weld-on: 1" ISO 2037 or DN25 DIN11850-R2	
- Clip-on: 1" ISO 2037	


Caution	
Avoid hydraulic shock, hard and abrasive particles in the cleaning liquid, as this can cause increased wear and/or damage of internal mechanisms. In general, a filter in the supply line is recommended. Do not use for gas evacuation or air dispersion. For steaming we refer to the manual.	

Flow Rate

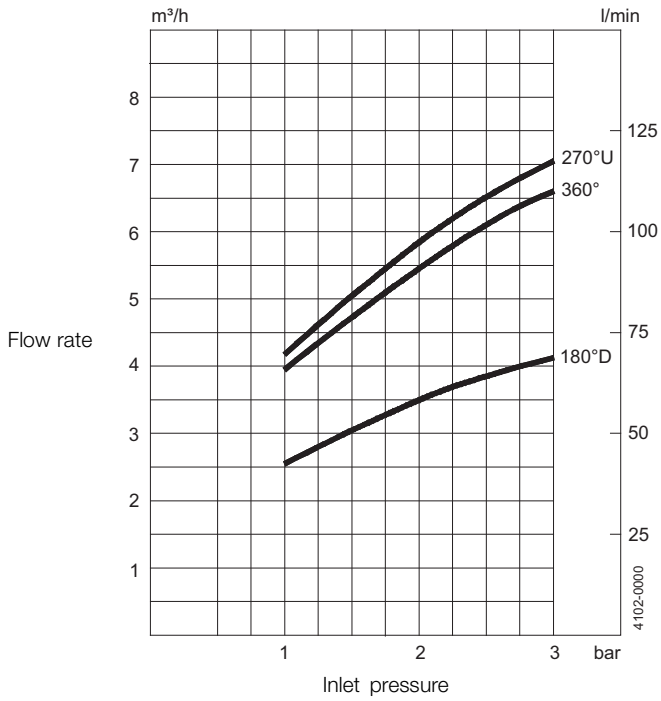

For clip-on models, the flow rate is increased by approx. 0.5m³/h.


Cleaning Radius

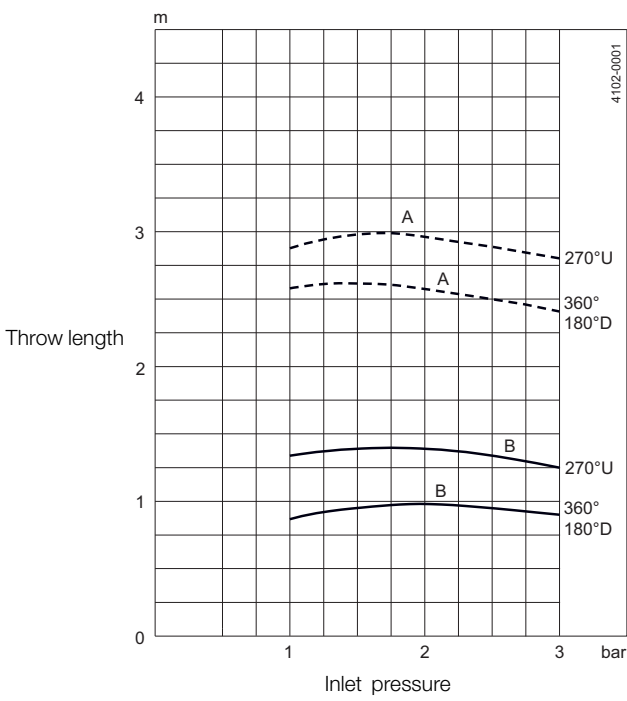


A: Wetting - B: Impact cleaning

Dimensions (mm)

Thread

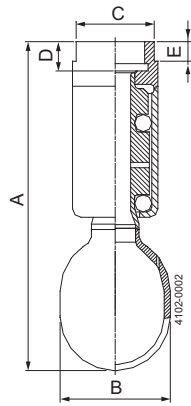


Clip-on

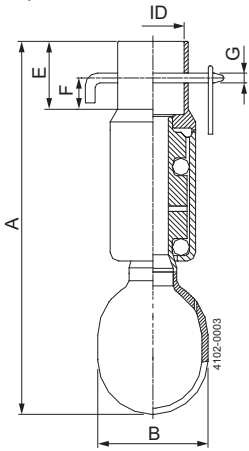

ID
ISO : $\varnothing 25.3$ mm

Weld-on

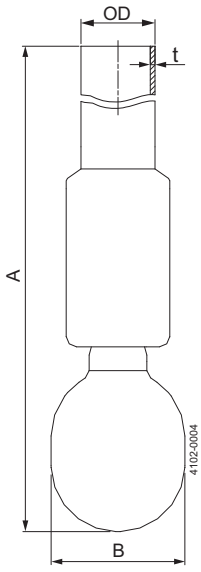

OD x t
Welded on pipe
ISO: $\varnothing 25 \times 1.2$ mm
DIN Range 2: $\varnothing 29 \times 1.5$ mm

TH
1/2" Rp (BSP)
3/4" Rp (BSP)
1/2" NPT
3/4" NPT

Type	A	B	C	D	E	F	G
Tread	137(BSP), 150(NPT)	$\varnothing 45$	32	12(BSP) 25(NPT)	9(BSP) 22.5(NPT)		
Clip-on	155	$\varnothing 45$			30	15	$\varnothing 4.2$
Weld-on	500	$\varnothing 45$					

Alfa Laval reserves the right to change specifications without prior notification.

How to contact Alfa Laval

Contact details for all countries
are continually updated on our website.
Please visit www.alfalaval.com to
access the information direct.